S CONTRACT LIFTING SERVICES



TECHNICAL INFORMATION

BÖCKER AK 46/6000 TRUCK CRANE



The operator can always have the best vantage point to safely operate the crane whilst it is lifting the load, this is due to the flexibility of the fact it is operated remotely by remote control, which can minimise the risk of blind lifting operations.

This crane has a maximum radius of 39 metres with a 250kg load, it will lift 1000kg to 26m radius.

With a maximum payload of up to 6 tonnes, the Böcker AK 46 Truck Crane provides customers with a strong combination of performance, enormous working ranges and unsurpassed efficiency.

The crane can be rigged with each outrigger set at an infinite variety of lengths, giving the end-user great flexibility in rigging situations on-site., The minimal tail swing allows the crane to rig and work in previously impossible situations.

This type of machine offers very low outrigger loadings in comparison with conventional all-terrain and truck-mounted cranes with comparable boom lengths.




SPECIFICATIONS


Böcker AK 46/6000

Payload max. (kg)	6,000
Extension length max. (m)	46.00
Mechanical extension length	33.00
Jib extendible (m)	5.28 / 8,14 / 11.00
Jib payload (kg)	3,000 / 1,500 / 800 / (450)
Main boom angle (degrees)	85
Swivel range (degrees)	+/- 310
Jib angle approx. (degrees)	162
Lifting speed (m/min)	45
Lifting speed (m/min) Support area L x W max. (m)	45 6.50 x 6.10



DIMENSIONS

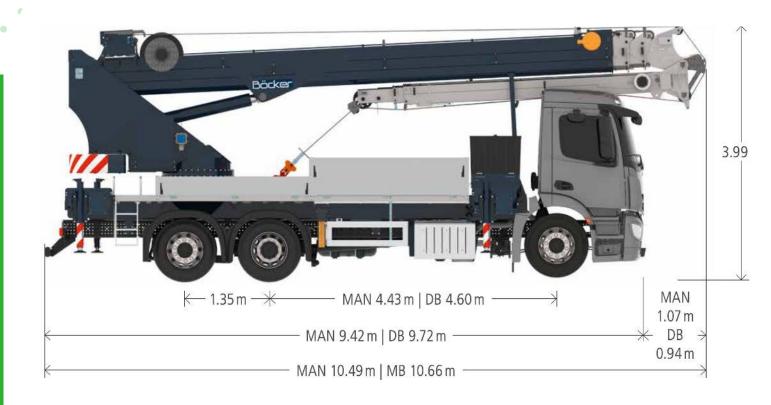

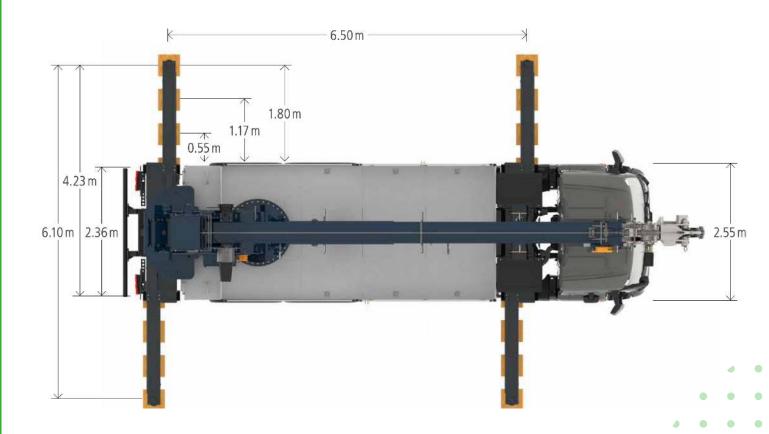

Böcker AK 46/6000

